

## 6.1 Finite Difference Method: An Example

Consider the following example boundary value problem:

$$\frac{d^2u}{dx^2} + 2\frac{du}{dx} = 0 \quad \text{with} \quad \begin{cases} u = 1, & @x = 0 \\ u = 0, & @x = 1 \end{cases}$$

### Analytical Solution Procedure

Let  $u = e^{rx}$ , hence  $u' = re^{rx}$  and  $u'' = r^2e^{rx}$ , substitute this relation back to the governing equation, we get

$$\begin{aligned} 0 &= r^2e^{rx} + 2re^{rx} \\ &= (r^2 + 2r)e^{rx} \end{aligned}$$

Hence,  $r_1 = 0 \Rightarrow u = 1$  and  $r_2 = -2 \Rightarrow u = e^{-2x}$ ,

$$u = A + Be^{-2x},$$

where  $A$  and  $B$  are two constants to be determined from the boundary conditions. Apply the boundary conditions,


$$\begin{cases} A + B = 1 \\ A + e^{-2}B = 0 \end{cases} \Rightarrow \begin{cases} A = -\frac{e^{-2}}{1-e^{-2}} \\ B = \frac{1}{1-e^{-2}} \end{cases}$$

Hence, the general solution is

$$u(x) = -\frac{e^{-2}}{1-e^{-2}} + \frac{1}{1-e^{-2}}e^{-2x}.$$

### Numerical Solution Procedure

First, we **discretize** the entire continuous domain into a finite number of  $N$  grids, with a constant distance between two adjacent grids being  $\Delta x$  (practically, of your own choice).

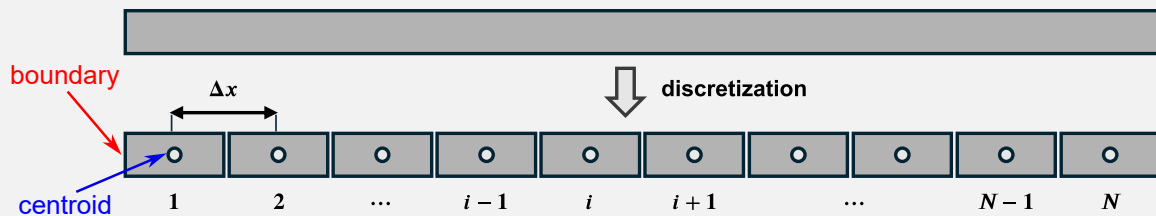

Let  $u(x_i + \Delta x)$  and  $u(x_i - \Delta x)$  denote the value of  $u$  at *next* grid and the *previous* grid in relation to the *current* grid  $x_i$ . We can use Taylor series expansion to find the value of  $u(x_i + \Delta x)$  and  $u(x_i - \Delta x)$  in terms of  $u(x_i)$ ,

$$u(x_i - \Delta x) = u(x_i) - u'(x_i)\Delta x + \frac{1}{2}u''(x_i)\Delta x^2 - \frac{1}{6}u'''(x_i)\Delta x^3 + \mathcal{O}(\Delta x^4) \quad (1)$$

$$u(x_i + \Delta x) = u(x_i) + u'(x_i)\Delta x + \frac{1}{2}u''(x_i)\Delta x^2 + \frac{1}{6}u'''(x_i)\Delta x^3 + \mathcal{O}(\Delta x^4) \quad (2)$$


Equation (1) + (2)  $\Rightarrow$  we will get the expression of the second order derivative term, (neglect the H.O.T.)

$$\begin{aligned} u(x_i - \Delta x) + u(x_i + \Delta x) &= 2u(x_i) + u''(x_i)\Delta x^2 + \mathcal{O}(\Delta x^4) \\ \Rightarrow u''(x_i) &= \frac{1}{\Delta x^2}[u(x_i - \Delta x) - 2u(x_i) + u(x_i + \Delta x)] + \mathcal{O}(\Delta x^2) \end{aligned}$$

Equation (2) - (1)  $\Rightarrow$  we will get the expression of the first order derivative term, (neglect the H.O.T.)

$$\begin{aligned} u(x_i + \Delta x) - u(x_i - \Delta x) &= 2u'(x_i)\Delta x + \frac{1}{3}u'''(x_i)\Delta x^3 + \mathcal{O}(\Delta x^4) \\ \Rightarrow u'(x_i) &= \frac{1}{2\Delta x}[u(x_i + \Delta x) - u(x_i - \Delta x)] + \mathcal{O}(\Delta x^2) \end{aligned}$$

The method shown above is commonly referred to as the **central differencing scheme**, which has a 2<sup>nd</sup>-order accuracy.

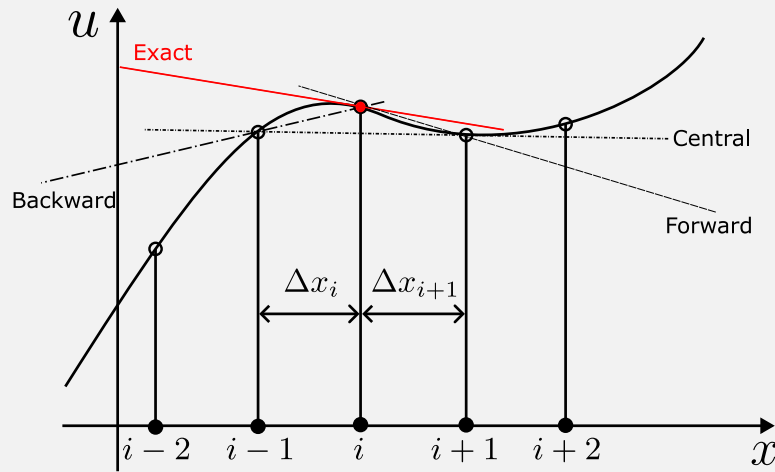

**FIG. 1:** A graphical illustration of approximating the first-order derivative  $du_i/dx$  using forward, backward, and central differencing schemes.

Hence, the governing equation


$$\Rightarrow \frac{1}{\Delta x^2}[u(x_i - \Delta x) - 2u(x_i) + u(x_i + \Delta x)] + \frac{2}{2\Delta x}[u(x_i + \Delta x) - u(x_i - \Delta x)] = 0$$

$$\Rightarrow \left(\frac{1}{\Delta x^2} - \frac{1}{\Delta x}\right)u(x_i - \Delta x) + \left(-\frac{2}{\Delta x^2}\right)u(x_i) + \left(\frac{1}{\Delta x^2} + \frac{1}{\Delta x}\right)u(x_i + \Delta x) = 0$$

For the index  $i$  ranges from 1 to  $N - 1$ , the above expression can be converted into the matrix form  $\mathbf{A}\mathbf{u} = \mathbf{b}$ ,

$$\underbrace{\begin{pmatrix} \left(-\frac{2}{\Delta x^2}\right) & \left(\frac{1}{\Delta x^2} + \frac{1}{\Delta x}\right) & 0 & 0 & \dots & 0 & 0 \\ \left(\frac{1}{\Delta x^2} - \frac{1}{\Delta x}\right) & \left(-\frac{2}{\Delta x^2}\right) & \left(\frac{1}{\Delta x^2} + \frac{1}{\Delta x}\right) & 0 & \dots & 0 & 0 \\ 0 & \left(\frac{1}{\Delta x^2} - \frac{1}{\Delta x}\right) & \left(-\frac{2}{\Delta x^2}\right) & \left(\frac{1}{\Delta x^2} + \frac{1}{\Delta x}\right) & \dots & 0 & 0 \\ 0 & 0 & \left(\frac{1}{\Delta x^2} - \frac{1}{\Delta x}\right) & \left(-\frac{2}{\Delta x^2}\right) & \dots & 0 & 0 \\ \vdots & \vdots & \vdots & \vdots & \ddots & 0 & 0 \\ 0 & 0 & 0 & 0 & \dots & \left(-\frac{2}{\Delta x^2}\right) & \left(\frac{1}{\Delta x^2} + \frac{1}{\Delta x}\right) \\ 0 & 0 & 0 & 0 & \dots & \left(\frac{1}{\Delta x^2} - \frac{1}{\Delta x}\right) & \left(-\frac{2}{\Delta x^2}\right) \end{pmatrix}}_{\mathbf{A}} \underbrace{\begin{pmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \\ \vdots \\ u_{N-2} \\ u_{N-1} \end{pmatrix}}_{\mathbf{u}} = \underbrace{\begin{pmatrix} -\frac{1}{\Delta x^2} + \frac{1}{\Delta x} \\ 0 \\ 0 \\ 0 \\ \vdots \\ 0 \\ 0 \end{pmatrix}}_{\mathbf{b}},$$

and  $\mathbf{u}$  is solvable by finding  $\mathbf{A}^{-1}\mathbf{b}$ .

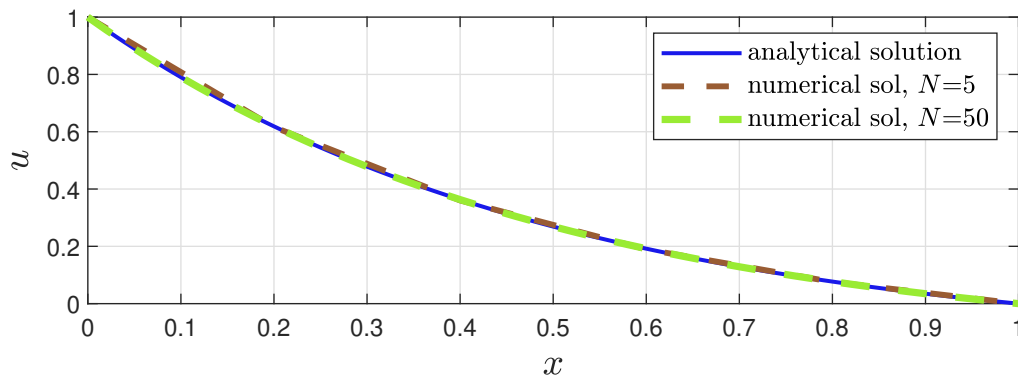

**FIG. 2:** Comparison of the analytical solution and the numerical solutions (discretized with  $N = 5$  and  $N = 50$ ) of the same governing equation.